



# Technical Specifying Unity

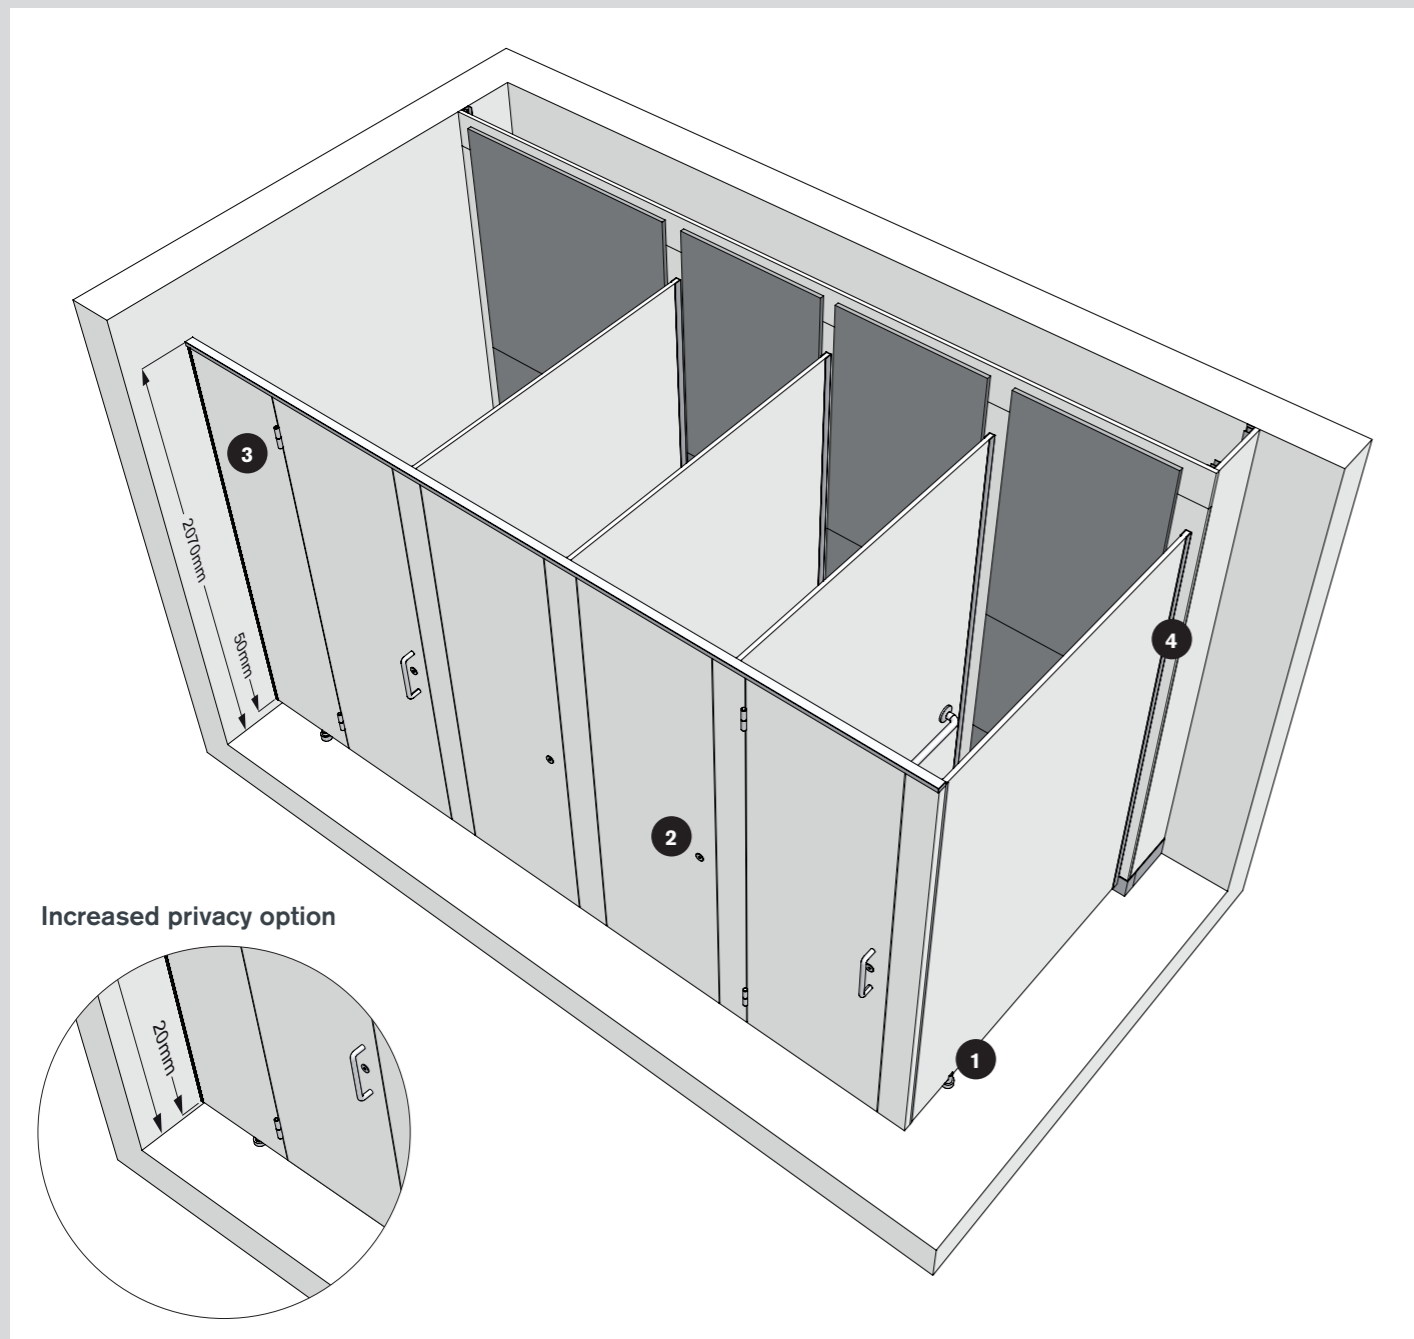

Increased privacy option

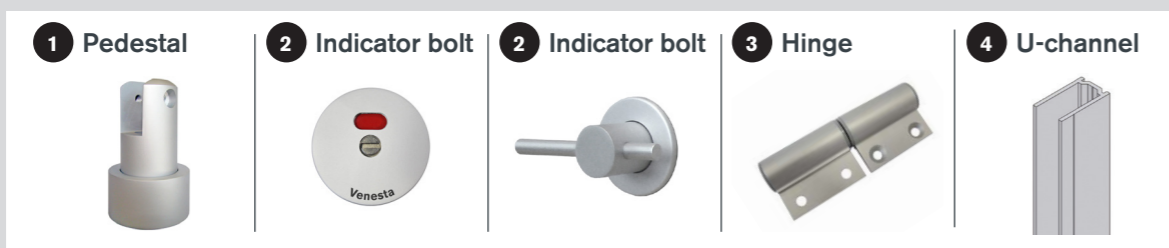

## Dimensions

<b>Unity</b>	
<b>Overall height</b>	
HPL	2070mm
SGL	2065mm
ColourCoat	2070mm
High Gloss	2070mm
<b>Maximum depth</b>	
HPL	2084mm
SGL	1921mm
ColourCoat	2084mm
High Gloss	2084mm
<b>Floor clearance</b>	50mm
<b>Minimum ceiling clearance</b>	20mm
<b>Unity Full Height</b>	
<b>Maximum height</b>	
HPL	2840mm
SGL	2822mm
ColourCoat	2840mm
High Gloss	2840mm
<b>Maximum depth</b>	
HPL	2084mm
SGL	1921mm
ColourCoat	2084mm
High Gloss	2084mm
<b>Floor clearance</b>	50mm
<b>Minimum ceiling clearance</b>	20mm
<b>Unity Full Height Privacy</b>	
<b>Overall height</b>	
HPL	2040mm
SGL	2035mm
ColourCoat	2040mm
High Gloss	2040mm
<b>Maximum height</b>	
HPL	2810mm
SGL	2793mm
ColourCoat	2810mm
High Gloss	2810mm
<b>Maximum depth</b>	
HPL	2035mm
SGL	1921mm
ColourCoat	2035mm
High Gloss	2035mm
<b>Floor clearance</b>	20mm
<b>Minimum ceiling clearance</b>	20mm

## Performance

Available in four material options, Unity is suitable for every type of wet or dry environment, allowing you to specify the most appropriate option to meet the site requirements and your budget.

### HPL

For more heavily used washrooms, panels are heat, scratch, impact and cigarette burn resistant. Moisture-resistant chipboard faced with high pressure laminate. Edges lipped with ABS. Doors and pilasters are 35mm nominal thickness with an MDF core, partitions are 18mm nominal thickness.

### SGL

Solid grade laminate is extremely resistant to impact and all surfaces are impervious to water. Panels are 13mm nominal thickness with polished black radiused edges.

### ColourCoat

Panels have an MDF core. Doors and pilasters are sprayed with a coat of primer and finished with 20% gloss pigmented lacquer. Doors and pilasters are 35mm nominal thickness, partitions are 18mm nominal thickness.

### ColourCoat High Gloss

Panels have an MDF core. Doors and pilasters are sprayed with a coat of primer and finished with 80% gloss pigmented lacquer. Doors and pilasters are 35mm nominal thickness, partitions are 18mm nominal thickness.

## Detailing

### Panels and doors

Available in HPL, SGL, ColourCoat and ColourCoat High Gloss.

### Colour finish

**HPL and SGL**  
34 colours from the standard range.

### ColourCoat

10 colours.

### ColourCoat High Gloss

10 colours.

### Cubicle hardware

Satin anodised aluminium and stainless steel.

### Edge treatment

#### HPL

Matching ABS lipping.

#### SGL

Polished black radiused edge.

#### ColourCoat

Edges sprayed with a coat of primer and finished with 20% gloss pigmented lacquer.

#### ColourCoat High Gloss

Edges are sprayed with a coat of primer and finished with 80% gloss pigmented lacquer.

### Headrail

Slimline satin anodised aluminium headrail with 3 part fixing system, allowing cubicles to finish 20mm below ceiling height.

### Cubicle hardware

#### Hinge

HPL, ColourCoat and ColourCoat High Gloss: Satin anodised aluminium modular rise and fall butt hinge, set to fall open or closed.

SGL: Stainless steel rise and fall patch hinge, set to fall into a closed position.

#### Fixings

Partition to wall fixing: Satin anodised aluminium u-channel.

Pilaster to partition fixing: Satin anodised aluminium u-channel.

Pilaster to wall fixing: Satin anodised aluminium E-channel for HPL, ColourCoat and ColourCoat High Gloss. Satin anodised aluminium L-angle for SGL.

#### Indicator bolt

Satin anodised aluminium flip indicator bolt with emergency release facility and faceplate with internal mortice lock, all with concealed fixings.

#### Pedestal

50mm FC: Adjustable satin anodised aluminium pedestal with a ± 5mm tolerance.  
20mm FC: In-line stainless steel pedestal with a tolerance 5mm. Satin anodised aluminium partition skirting.

### Accessories

Coat hooks and toilet roll holders available.